


BUTTONING & ATTACHING TIES

CLAIMS:

CONSTRUCTIONS OF THE TIE DESIGNED TO HOLD THE TIE IN A RIGHT (FIXED) POSITION UNDER CERTAIN CONDITIONS, AS SHOWN AND DESCRIBED. THE OFFERED CONSTRUCTIONAL ADDINIONS ALLOW NOT TO USE VARIOUS TYPES OF PINS OR CLIPS. AT A NEEDED MOMENT, THE TIE IS BUTTONED TO ONE OF THE BUTTONS OF A SHIRT BY ONE OF ITS BUTTONHOLES, WHICH IS LOCATED ON THE SAME LEVEL AS THE BUTTON (VARIATIONS 1), OR WITH A BURRETTE TO THE STRAPE OF THE SHIRT (VARIATION 2).

INVENTOR

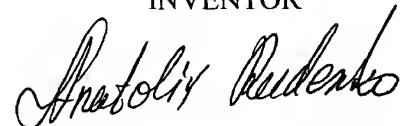

Page 1 of 9